

Addressable Call Points

(ZT-CP3/AD & ZT-CP3/WP/AD)



ZT-CP3/AD

ZT-CP3/AD/WP

ZT-CP3/AD/W

Description

The ZT-CP3/AD and ZT-CP3/AD/WP addressable call points are unique in that they mimic the feel of breaking glass whilst offering the user the benefits and environmental advantages of a re-settable operating element.


Addressing these call points is via an 8 way dip switch on the back of the call point. The design also provides a visual LED indication to confirm alarm activation.




A special Polycarbonate cover (CP3-CV) is available for extra protection against accidental activation and thus allowing the unit to operate as a double action call point. This must be ordered separately.



Dimensions (mm) & Weight (g)

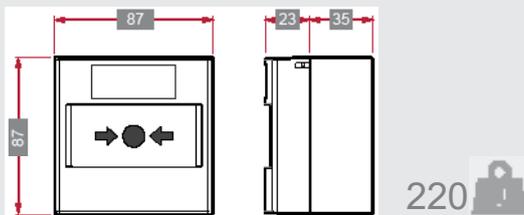

220g

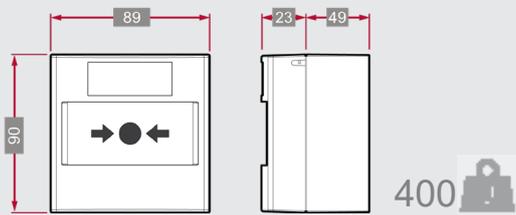

400g

ZT-CP3/WP/AD

Features

- EN54-11 approved
- Waterproof tested to IP67 (ZT-CP3/AD/WP only)
- Glass appearance maintains operator deterrence
- Positive activation that mimics the feel of breaking glass
- Visible warning flag confirms activation
- Simple key to reset operating element (no broken glass)
- Complete functional test with every activation
- Available in two colours

Technical Specification



| Model | ZT-CP3/AD | ZT-CP3/AD/W | ZT-CP3/AD/WP |
|-----------------------|--------------------------------|--------------------------------|--------------|
| Input Voltage | 17-28V DC | | |
| Element Type | Resettable | | |
| Quiescent Current | 600µA Maximum | | |
| Alarm Current | 2.5mA Maximum | | |
| Operating Temperature | -20 degrees C to +60 degrees C | -20 degrees C to +65 degrees C | |
| Max Humidity | 95%RH Non-Condensing | | |
| IP Rating | IP32 | IP67 | |
| Size (W x H x Dmm) | 87 x 87 x 23 | 89 x 90 x 23 | |

Optional Extras

| Order Code | Description |
|------------|--|
| CP3-CV | Perspex Cover for CP3 Series Manual Call Point |
| CP3-FMB | Flush Mount Bezel For Indoor CP3 Series Manual Call Points |